

DRYFIT® BLOCK TECHNOLOGY SONNENSCH EIN GF-Y RANGE



Range GF-Y (dryfit® A500 Cyclic)

The GF-Y range* is particularly suitable for the leisure and mobility market with applications including electric boats, golf carts, wheelchairs, and scooters.

Main technical features and benefits:

- VRLA (valve regulated battery technology), electrolyte is fixed in a gel
- Maintenance-free (no topping up) during the whole service life due to the Sonnenschein dryfit® technology
- 450 cycles according to IEC 60254-1
- Very robust




Technical characteristics and data

Type	Nominal voltage V	Nominal capacity C ₅ (30 °C) Ah	Nominal capacity C ₂₀ (30 °C) Ah	Length (l) max. mm	Width (b/w) max. mm	Height (h) max. mm	Weight** kg	Terminal	Terminal position
GF 12 014 Y F	12	14.0	15.0	181	76.0	167	6.00	G-M5	3
GF 12 022 Y T	12	22.2	24.0	167	176	126	8.50	F-M5	3
GF 12 025 Y G	12	25.0	28.0	197	132	180	11.1	G-M6	2
GF 12 033 Y 1	12	32.5	38.0	210	175	175	14.6	A-Terminal	3
GF 12 033 Y G1*/G2	12	32.5	38	210	175	175	14.6	G-M6	3
GF 12 040 Y	12	40	48	242	175	190	17.5	A-Terminal	3
GF 12 044 Y	12	44	50	261	135	230	18.0	A-Terminal	3
GF 12 051 Y 1/ 2*	12	51	56	278	175	190	20.8	A-Terminal	3
GF 12 051 Y G1	12	51	56	278	175	190	20.8	G-M6	3
GF 12 052 Y 0	12	52.7	60	261	170	178	19.8	F-M6	2
GF 12 063 Y04	12	63	70	261	171	210	22.2	F-M6	2
GF 12 065 Y*	12	65	78	353	175	190	26.8	A-Terminal	3
GF 12 072 Y	12	72	80	330	171	236	28.2	A-Terminal	2
GF 12 094 Y	12	93.5	110	286	269	230	38.5	A-Terminal	1

* with hold down ** The weights may exhibit a tolerance of +/-5%

Drawings with terminal position, terminal and torque

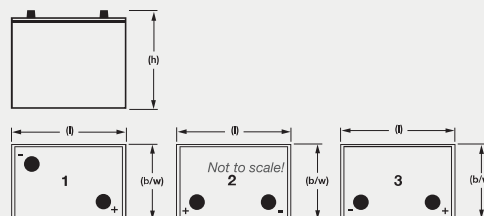

Specifications

Nominal capacity 14 - 93,5 Ah (C ₅) 15 - 110 Ah (C ₂₀)	Block battery	Grid plate	450 cycles in accordance with IEC 60254-1	Recyclable	Valve regulated lead-acid batteries	Proof against deep discharge	Maintenance-free (no topping up)

