




LDC Series-Cycle Application

LDC12-20(12V20Ah)

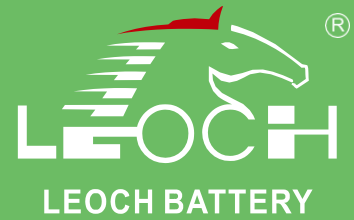


Specifications

Rated Voltage	12V		
Rated Capacity(C ₂₀ , 1.75V/cell)	20Ah		
Dimensions	Length	181.5±2mm (7.14 inches)	
	Width	76.5±1mm (3.01 inches)	
	Container Height	167.5±2mm (6.59 inches)	
	Total Height	167.5±2mm (6.59 inches)	
Approx Weight	6.00 Kg (13.2 lbs)		
Terminal	M5		
Container Material	ABS		
	18.9Ah	(10hr, 1.89A, 1.75V/cell)	
	17.3Ah	(5hr, 3.46A, 1.75V/cell)	
Short Circuit Current	560A		
Internal Resistance(25°C)	≤14mΩ		
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)	
	Charge	0~40°C (32~104°F)	
	Storage	-20~50°C (-4~122°F)	
Nominal Operating Temp. Range	25±3°C (77±5°F)		
Max.Charging Current(25°C)	5.0A		
Charge voltage(25°C)	Float	Charge Voltage	Temp. Coefficient
	Cycle	2.25~2.30V/cell	-3mV/cell/°C
Effect of temp. to Capacity	40°C (104°F)	2.35~2.45V/cell	-5mV/cell/°C
	25°C (77°F)	106%	
	0°C (32°F)	100%	
Self Discharge	80%		
	≤3%/month @ 25°C		



Layout

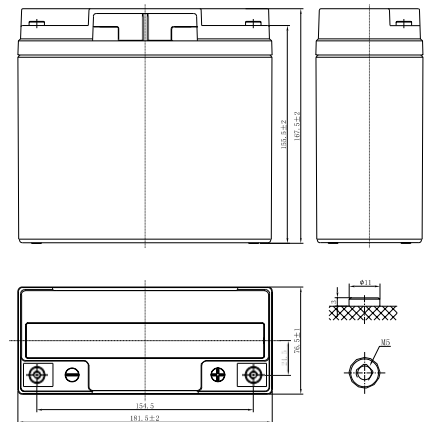

Constant Current Discharge (Amperes) at 25 °C (77 °F)

F.V/Time	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	12.0	6.88	4.96	3.96	3.37	2.88	2.27	1.85	0.978
1.80V/cell	12.3	7.01	5.05	4.01	3.42	2.93	2.30	1.87	0.989
1.75V/cell	12.6	7.13	5.13	4.07	3.46	2.96	2.33	1.89	1.00
1.70V/cell	12.8	7.24	5.20	4.12	3.51	3.00	2.35	1.91	1.01


Constant Power Discharge (Watts/cell) at 25 °C (77 °F)

F.V/Time	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	23.4	13.5	9.76	7.80	6.65	5.70	4.50	3.67	1.96
1.80V/cell	23.9	13.7	9.90	7.89	6.74	5.79	4.56	3.72	1.98
1.75V/cell	24.3	13.9	10.0	7.99	6.81	5.84	4.61	3.75	2.00
1.70V/cell	24.6	14.1	10.2	8.09	6.90	5.91	4.65	3.79	2.02



LDC Series-Cycle Application

LDC12-20(12V20Ah)

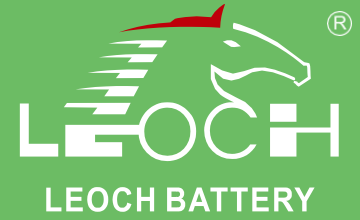

Applications

- Electric tools
- Mobility Scooter
- Golf trolleys
- Portable lights and instruments
- Electric toys
- Portable power
- Electric wheelchair


General Features

- Good cyclic property. Enhanced overcharge endurance and overdischarge recovery property
- Using oxygen recombination technology: maintenance-free
- Lower acid density, excess of electrolyte and larger distance between plates to keep battery at low temperature and slow down plate grid corrosion speed
- Unique plate group configuration, high quality AGM separator and battery management system ensure battery with a longer service life


Standards

- ACC. to BCI standards
- Manufactured in Leoch® IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities


Discharge Characteristics

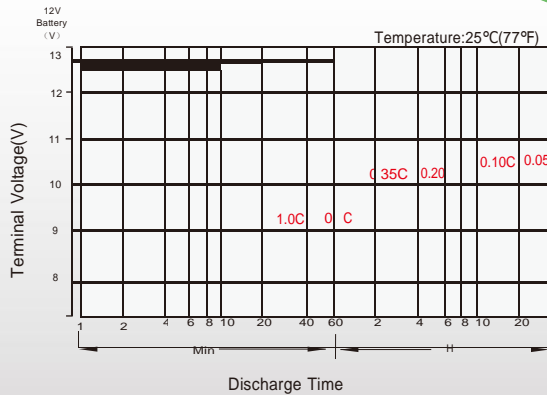


Charging Characteristics

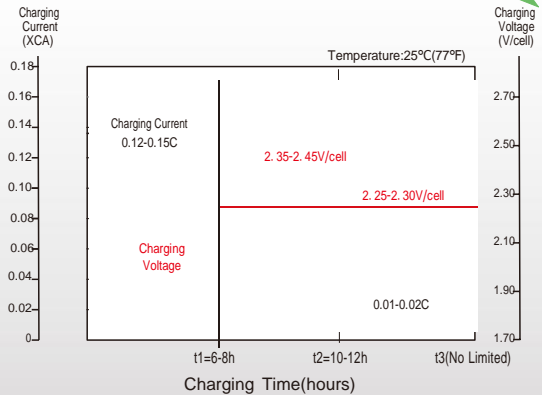

Cycle Life in Relation to Depth of Discharge

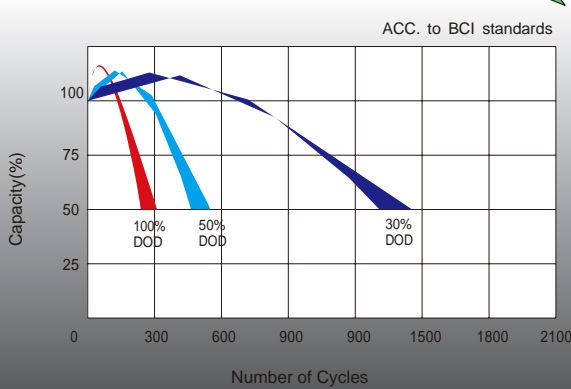

Self Discharge Characteristics

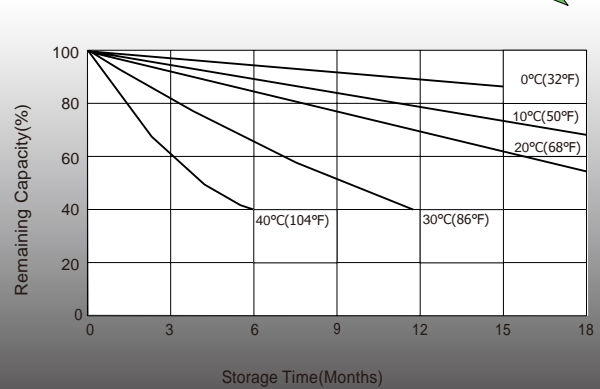

Sales Offices Worldwide

China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-205-86036060 (100 lines)
Fax: +86-205-20067209
E-mail: export@leoch.com

North America Sales Office

19751 Descartes
Foothill Ranch, CA 92010, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.us
Http:// www.leoch.us

HongKong Sales Office

Workshop C, 20/F, TML Tower, No. 3 Hoi Shing Road,
Tsuen Wan, New Territories, Hong Kong
Tel: +852 35786666
Fax: +44 1452 690125
E-mail: sales.hk@leoch.com

UK Sales Office

9B Wheatstone Court. Waterwells, Business Park,
Gloucester, GL2-2AQ, UK United Kingdom
Tel: +44(0) 1452 729208 / 1452 729696
Fax: +44 1452 690125
E-mail: Sales.Europe@leoch.com
Http:// www.leoch.eu

Singapore Sales Office

No. 1 Tech Park Crescent,
Singapore 620131
Tel: +65 68636078
Fax: +65 6863 6079
Email: sales.sg@Leoch.com

EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,
Greece
Tel: +30 210 5760318 (2 lines)
E-mail: support_EMEA@leoch.com
Http:// www.leoch.eu

Australia Sales Office

2 /29 Tarlington Place, Smithfield. NSW 2164
Australia
Tel: 02 9756 0950
E-mail: sales.au@leoch.com

India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,
Bangalore North Taluk, Bangalore-560058, India
Tel: +91-80-23440018/23440019
Fax: +91-80-23440017
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 2022 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
Subject to revisions without prior notice.

Publication No.: LB-LPC12-20-PD-EN-V2.2-202209