



Yuasa Fiche de données techniques

Yuasa YBX3056 - Batteries SMF YBX3000

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Tension	12V
Capacité (20 heures)	36Ah
Performances en démarrage à froid (EN1)	330A

Dimensions

Longueur	187mm
Largeur	135mm
Hauteur	227mm



Poids & Mesures

Poids moyen avec acide	9.3kg
------------------------	-------

Caractéristiques du bac

Type de bac	JIS B19 + B1
Système de fixation	B1
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)


Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	3A
Performance Marking	W3-C2-V2-E1

Type de bornes

T1/T3

Standard DIN Post



Remove T1 adapter for T3





Schéma de montage des éléments Système de fixation de la batterie



Date de publication: 24/09/2021 - E&OE

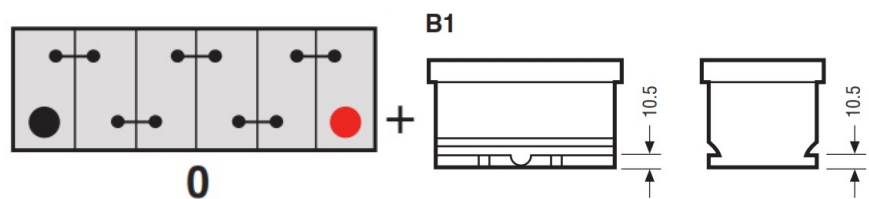

Yuasa Technical Data Sheet

Yuasa YBX3056 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	36Ah
Cold Cranking Amps (EN1)	330A

Dimensions

Length	187mm
Width	135mm
Height	227mm



Weights & Measures

Mean Weight with Acid	9.3kg
-----------------------	-------

Container Features

Case Type	JIS B19 + B1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W3-C2-V2-E1


Terminal Type

T1/T3


Standard DIN Post




Remove T1 adapter for T3



Cell Assembly Layout

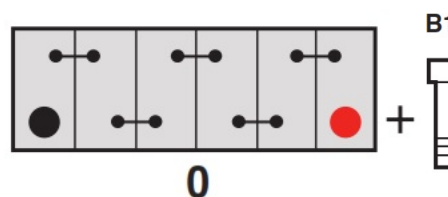

Battery Hold-down

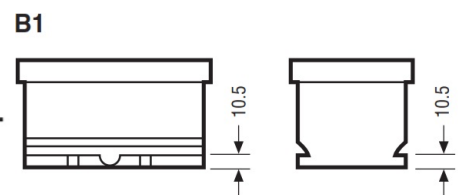

Data Sheet generated on 24/09/2021 – E&OE